


**Note : U points 9 and 11 make when relay set is removed**

64,62 60,58 56,54 52,50 48,46 44,42 40,38 36,34 33,35 37,39 41,43 45,47 49,51 53,55 57,59 61,63

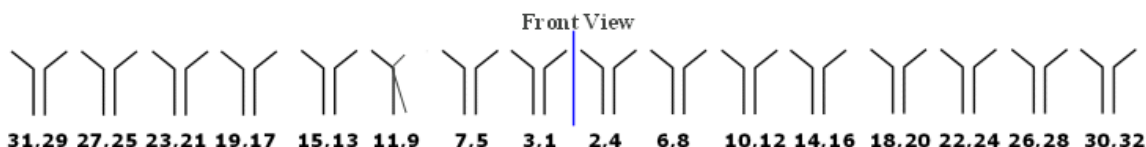

63,61 59,57 55,53 51,49 47,45 43,41 39,37 35,33 34,36 38,40 42,44 46,48 50,52 54,56 58,60 62,64

- |                                    |                                    |                                     |                                     |
|------------------------------------|------------------------------------|-------------------------------------|-------------------------------------|
| 1 -1 line, <b>101 KLU</b>          | 2 -2 line, <b>102 KLU</b>          | 33 <b>CL-</b> line 3 <b>33 KLU</b>  | 34 <b>CL-</b> line 4 <b>34 KLU</b>  |
| 3 -3 line, <b>103 KLU</b>          | 4 -4 line, <b>104 KLU</b>          | 35 <b>CL-</b> line 5 <b>35 KLU</b>  | 36 <b>CL-</b> line 6 <b>36 KLU</b>  |
| 5 -5 line, <b>105 KLU</b>          | 6 -6 line, <b>106 KLU</b>          | 37 <b>CL-</b> line 7 <b>37 KLU</b>  | 38 <b>CL-</b> line 8 <b>38 KLU</b>  |
| 7 -7 line, <b>107 KLU</b>          | 8 -8 line, <b>108 KLU</b>          | 39 <b>Call 16 Timer</b>             | 40 <b>OPB 40 KLU</b>                |
| 9                                  | 10 <b>OPL 8 Op R/S</b>             | 41 <b>CLE</b> line 1 <b>141 KLU</b> | 42 <b>CLE</b> line 2 <b>142 KLU</b> |
| 11 <b>Earth</b>                    | 12 <b>Batt</b>                     | 43 <b>CLE</b> line 3 <b>143 KLU</b> | 44 <b>CLE</b> line 4 <b>144 KLU</b> |
| 13 +1 line                         | 14 +2 line                         | 45 <b>CLE</b> line 5 <b>145 KLU</b> | 46 <b>CLE</b> line 6 <b>146 KLU</b> |
| 15 +3 line                         | 16 +4 line                         | 47 <b>CLE</b> line 7 <b>147 KLU</b> | 48 <b>CLE</b> line 8 <b>148 KLU</b> |
| 17 +5 line                         | 18 +6 line                         | 49 <b>L 3 Op R/S</b>                | 50 <b>OPL 150 KLU</b>               |
| 19 +7 line                         | 20 +8 line                         | 51 <b>K 121 KLU</b>                 | 52 <b>K 122 KLU</b>                 |
| 21 <b>D-</b> line 1 <b>21 KLU</b>  | 22 <b>D-</b> line 2 <b>22 KLU</b>  | 53 <b>K 123 KLU</b>                 | 54 <b>K 124 KLU</b>                 |
| 23 <b>D-</b> line 3 <b>23 KLU</b>  | 24 <b>D-</b> line 4 <b>24 KLU</b>  | 55 <b>K 125 KLU</b>                 | 56 <b>K 126 KLU</b>                 |
| 25 <b>D-</b> line 5 <b>25 KLU</b>  | 26 <b>D-</b> line 6 <b>26 KLU</b>  | 57 <b>K 127 KLU</b>                 | 58 <b>K 128 KLU</b>                 |
| 27 <b>D-</b> line 7 <b>27 KLU</b>  | 28 <b>D-</b> line 8 <b>28 KLU</b>  | 59 <b>PHA 71-78 KLU, 14 op r/s</b>  | 60 <b>PHB 79 KLU, 15 op r/s</b>     |
| 29 <b>LST 9 Op R/S</b>             | 30 <b>RUS1 7 Op R/S</b>            | 61 <b>Op+ 2 Op R/S</b>              | 62 <b>SC 10 Op R/S</b>              |
| 31 <b>CL-</b> line 1 <b>31 KLU</b> | 32 <b>CL-</b> line 2 <b>32 KLU</b> | 63                                  | 64 <b>Op- 1 Op R/S</b>              |

**Black U points cabled to MDF (16 wires to MDF)**

**Red U points cabled to Common Services**

**Blue U points cabled to KLU (44 wires to KLU)**

**Green U points wired to Operators Relay Set (9 wires to Ops R/S)**

**Purple U points wired to Timer Relay Set (1 wire to timer R/S)**

## Lydney Junction Wiring of U points on Concentrator Line Circuit Relay Set

Lydney Sig Box - Concentrator Line Circuit U Points		
DFR Ic040a		
ISSUE A	12/02/2018	Opening Issue
<i>Dean Forest Railway</i>		